


Ladda upp Telia-konfiguration


Denna guide visar dig hur du laddar upp en Telia-konfigurationsfil i ditt VDSL-modem.

Logga in i ditt VDSL-modem genom att starta din webbläsare och skriv in adressen 192.168.1.1. Tryck därefter Enter.



Du kommer att dirigeras till en inloggningsbild där du anger produktens lösenord. Standard från fabrik är 1234. Har du tidigare ändrat lösenord, gäller naturligtvis ditt personliga lösen.

Efter inloggning visas huvudmenyn:

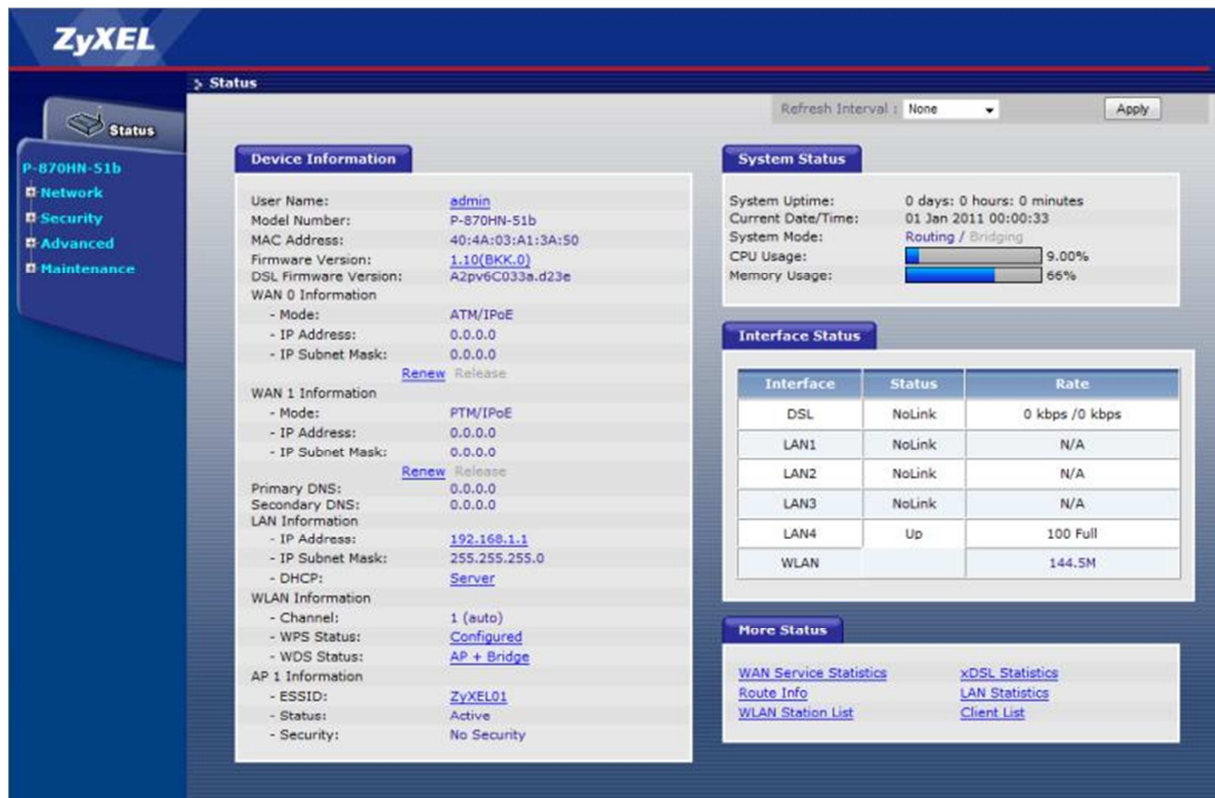A screenshot of the ZyXEL modem's web interface. The page is titled "Status" and shows various system metrics and configuration details. The left sidebar contains a navigation menu with options like "Network", "Security", "Advanced", and "Maintenance". The main content area is divided into several sections: "Device Information", "System Status", "Interface Status", and "More Status".

| Interface | Status | Rate |
|-----------|--------|-----------------|
| DSL | NoLink | 0 kbps / 0 kbps |
| LAN1 | NoLink | N/A |
| LAN2 | NoLink | N/A |
| LAN3 | NoLink | N/A |
| LAN4 | Up | 100 Full |
| WLAN | | 144.5M |

För att komma till området där du laddar upp konfigurationsfilen klicka du i vänster meny på "Maintenance", och sen på "Tools":

ZyXEL

➤ Status

Refresh Interval : None

Device Information

User Name: [admin](#)
 Model Number: P-870HN-51b
 MAC Address: 40:4A:03:A1:3A:50
 Firmware Version: [1.10\(BKX_0\)](#)
 DSL Firmware Version: A2pv6C033a.d23e

WAN 0 Information
 - Mode: ATM/IPoE
 - IP Address: 0.0.0.0
 - IP Subnet Mask: 0.0.0.0
[Renew](#) [Release](#)

WAN 1 Information
 - Mode: PTM/IPoE
 - IP Address: 0.0.0.0
 - IP Subnet Mask: 0.0.0.0
[Renew](#) [Release](#)

Primary DNS: 0.0.0.0
 Secondary DNS: 0.0.0.0

LAN Information
 - IP Address: [192.168.1.1](#)
 - IP Subnet Mask: 255.255.255.0
 - DHCP: [Server](#)

WLAN Information
 - Channel: 1 (auto)
 - WPS Status: [Configured](#)
 - WDS Status: [AP + Bridge](#)

AP 1 Information
 - ESSID: [ZyXEL01](#)
 - Status: Active
 - Security: No Security

System Status

System Uptime: 0 days: 0 hours: 0 minutes
 Current Date/Time: 01 Jan 2011 00:00:57
 System Mode: Routing / Bridging
 CPU Usage:
 Memory Usage:

Interface Status

| Interface | Status | Rate |
|-----------|--------|-----------------|
| DSL | NoLink | 0 kbps / 0 kbps |
| LAN1 | NoLink | N/A |
| LAN2 | NoLink | N/A |
| LAN3 | NoLink | N/A |
| LAN4 | Up | 100 Full |
| WLAN | | 144.5M |

More Status

[WAN Service Statistics](#) [xDSL Statistics](#)
[Route Info](#) [LAN Statistics](#)
[WLAN Station List](#) [Client List](#)

När du klickat på "Tools" visas nya alternativ i mitten av skärmen. Överst finner du tre flikar, "Firmware", "Configuration" och "Restart". Välj fliken "Configuration", och sen på "Bläddra" för att välja den fil du vill ladda upp:

ZyXEL

➤ Maintenance > Tools > Configuration

Firmware **Configuration** Restart

Backup Configuration

Click **Backup** to save the current configuration of your system to your computer.


Restore Configuration

To restore a previously saved configuration file to your system, browse to the location of the configuration file and click **Upload**.
 File Path :


Back to Factory Defaults

Click **Reset** to clear all user-entered configuration information and return to factory defaults.
 - Password will be 1234
 - LAN IP address will be 192.168.1.1
 - DHCP will be reset to server

Sök upp Telia-konfigurationsfilen som heter "P-870HN-51b_Telia.conf", som du tidigare laddat ner.

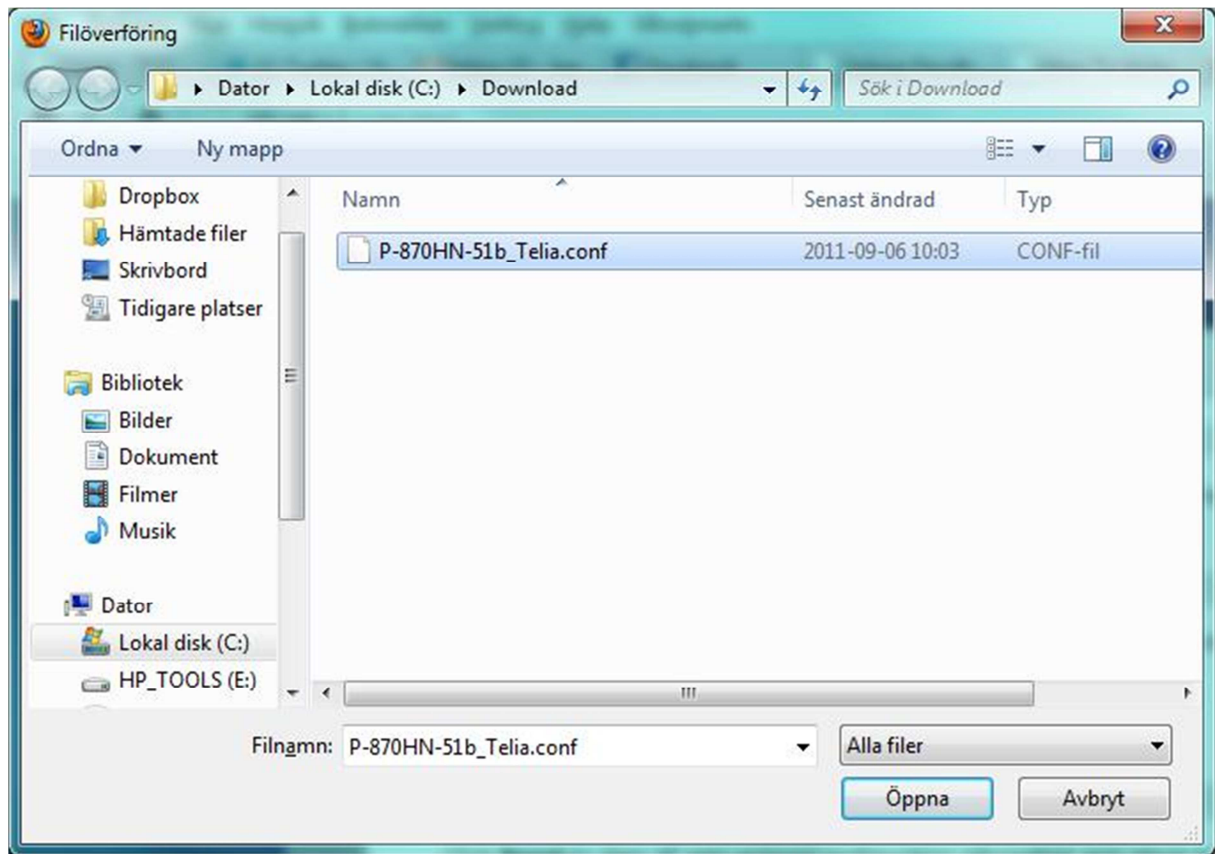

När den filen är vald klickar man på "Upload", vilket gör att filen laddas upp och följande meddelande visas:

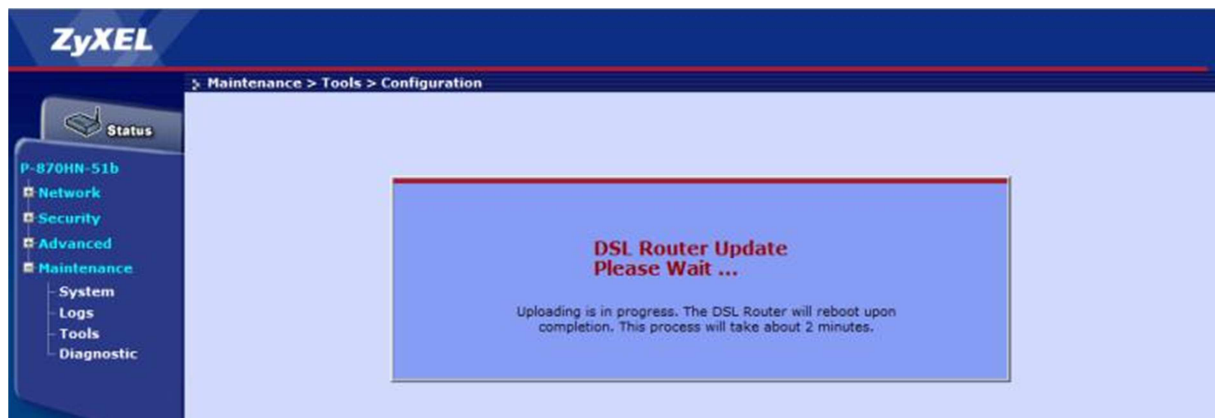

OBS! Stäng **ALDRIG** av produkten under uppladdningen.

Efter en lyckad uppladdning kommer P-870HN-51b vara konfigurerad för Telia. LAN-port 1 används för internetåtkomst, LAN-port 2 för IPTV och LAN-port 3 för telefoni (om man har de tjänsterna).